

WE MAKE SOLAR ENERGY MORE EFFICIENT AND SIMPLE!

BRIGHTSUN

POWER CORPORATION



BSM 130-156

POLYCRYSTALLINE SOLAR MODULE



High module conversion efficiency, through superior manufacturing technology



Easy installation and handling for various applications



Entire module certified to withstand high wind loads (2400 Pa) and snow loads (5400 Pa)



ISO9001, OHSAS18001, ISO14001



An Brightsunpower high-power residential solar module is an aesthetic addition to most roofs

ENGINEERING EXCELLENCE

The perfect combination of high performance and design

ADVANCED AESTHETICS

Has an elegant appearance that blends beautifully with your home roof line

DURABLE

Provides long life and enhanced cell performance

HIGH PERFORMANCE

Uses advanced surface texturing to improve efficiency



Brightsunpower PV modules offer BTS-leading performance for a variety of applications

Power your application

When you choose Brightsunpower, you get more well-engineered products, you also get our proven reliability, outstanding customer service and the assurance of our 25-year limited warranty

130 Watt

Electrical Characteristics

Type of Cell	Polycrystalline silicon
Cell Size(mm)	156mm
Module Efficiency	14.7%
Cell Configuration	36(4x9)
Size of module (mm)	1375x670x35mm
Weight per piece (Kg)	11.4Kg
Maximum power (Wp)	130W
Maximum power voltage (V)	17.7V
Maximum power current (A)	7.35A
Open circuit voltage (V)	22.3V
Short circuit current (A)	7.94A
Tolerance of Pmax	0/+5%

Standard Operating Conditions

Maximum system voltage (V)	1000V
Temperature coefficients of Isc (%)	0.045%/°C
Temperature coefficients of Voc (%)	-0.34%/°C
Temperature coefficients of Pm (%)	-0.43%/°C
NOCT (°C)	47°C±2°C
Temperature range	-40°C to +85°C
Surface maximum load capacity	60m/s (200kg/sq.m)
Series fuse rating	15 A

Other Characteristics

Junction box type	Ip65 rated
Connectors and cables type	4mm ²
Length of cables (mm)	900mm
Frame (material, corners, etc.)	Anodized aluminum alloy
Glass	High transmissivity low-iron 3.2 mm toughened glass
FF (%)	≥ 73.4%

QUALIFICATIONS


IEC	D'E	IEC 61215	IEC 61730	RoHS
CE	EMC			

5 years material and workmanship guarantee


95% power output guarantee for 5 years
90% power output guarantee for 10 years
80% power output guarantee for 25 years

Brightsunpower will not accept responsibility for damage caused to other equipment

Contact Brightsunpower to receive our latest product information



Characteristics (Module I-V Graph 130W)

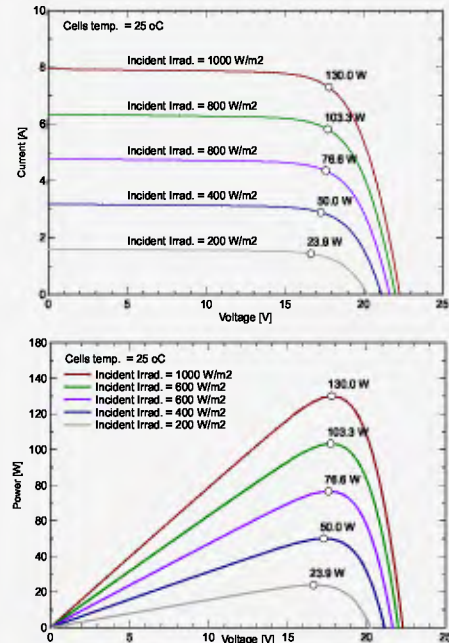

STC: Irradiance 1000W/m², Module temperature 25°C, AM1.5 spectrum.

Dimension

