

BSP-80WSM

MONOCRYSTALLINE SOLAR MODULE



High module conversion efficiency (up to 17%), through superior manufacturing technology




Easy installation and handling for various applications



Entire module certified to withstand high wind loads (2400 Pa) and snow loads (5400 Pa)



ISO9001, OHSAS18001, ISO14001

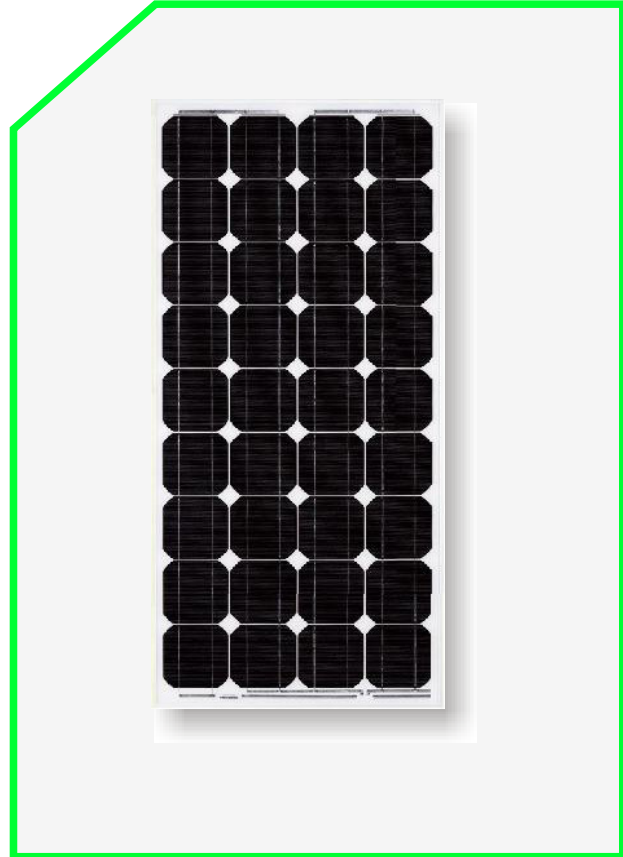

A BrightSun high-power residential solar module is an aesthetic addition to most roofs

ENGINEERING EXCELLENCE

The perfect combination of high performance and design

ADVANCED AESTHETICS

Has an elegant appearance that blends beautifully with your home roof line

DURABLE

Provides long life and enhanced cell performance

HIGH PERFORMANCE

Uses advanced surface texturing to improve efficiency



BrightSun PV modules offer BTS-leading performance for a variety of applications

Power your application

When you choose BrightSun, you get more well-engineered products, you also get our proven reliability, outstanding customer service and the assurance of our 25-year limited warranty

80 Watt

Electrical Characteristics

Cell Size(mm)	125×125mm
Cell Efficiency (%)	>17.0%
Type of Cell	Monocrystalline silicon
Cell Configuration	36(4x9)
Size of module (mm)	1200x540x35mm
Weight per piece (Kg)	8.5Kg
Maximum power (Wp)	80W
Maximum power voltage (V)	17.4V
Maximum power current (A)	4.60A
Open circuit voltage (V)	21.6V
Short circuit current (A)	5.06A
Tolerance of Pmax	0/+5%

Standard Operating Conditions

Maximum system voltage (V)	1000V
Temperature coefficients of Isc (%)	(0.06±0.01) %/K
Temperature coefficients of Voc (%)	-(78±10) mV/K
Temperature coefficients of Pm (%)	-(0.5±0.05) %/K
NOCT (°C)	48±2°C
Temperature range	-40°C to +85°C
Surface maximum load capacity	60m/s (200kg/sq.m)
Series fuse rating	8A

Other Characteristics

Junction box type	Ip65 rated
Connectors and cables type	2.5mm ²
Length of cables (mm)	650mm
Frame (material, corners, etc.)	Anodized aluminum alloy
Glass	High transmissivity low-iron 3.2 mm toughened glass
FF (%)	≥73.3%

QUALIFICATIONS



IEC 61215 IEC 61730 RoHS



10 years material and workmanship guarantee


95% power output guarantee for 5 years
90% power output guarantee for 10 years
80% power output guarantee for 25 years

BrightSun will not accept responsibility for damage caused to other equipment

Contact BrightSun to receive our latest product information



Characteristics (Module I-V Graph 80W)

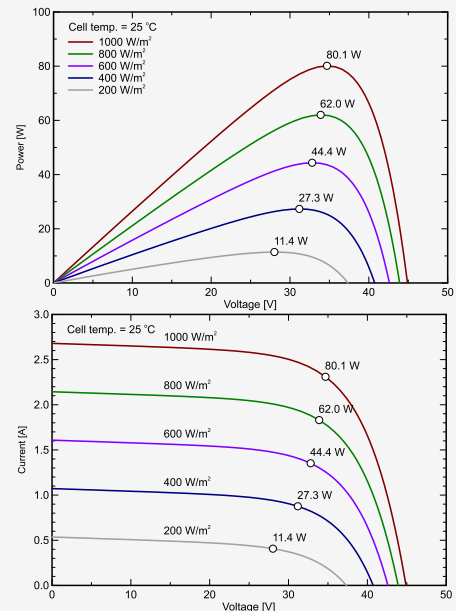

STC: Irradiance 1000W/m², Module temperature 25°C, AM1.5 spectrum.

Dimension

